


Specification sheet

XD 230

FA 4X2 Rigid, 19t

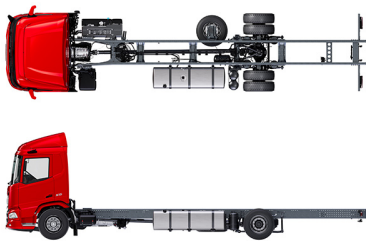

ENGINES

- XD NewGen 230 PX-7 (167 kW / 227 hp)
- XD NewGen 260 PX-7 (189 kW / 257 hp)
- XD NewGen 290 PX-7 (212 kW / 287 hp)
- XD NewGen 310 PX-7 (227 kW / 308 hp)

GVM¹⁾

- 19000 kg
-
- Max. front 7000 kg
- Max. rear 13000 kg

GCM²⁾

- 19000 kg

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; DAF Corner View.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
01226 Cab suspension air	06629 Two hazard beacon lights
03358 External sun visor	03232 Front windscreen with solar control foil
03922 Fog lights front	03317 Rear window: double glass
00936 Auxiliary LED lights on cab roof, prepared	07343 Kerb view window co-driver door
01836 LED Skylights	01362 DAF Digital Vision System
00949 LED Skylights; aux. LED lights on cab rf, prepared	

AERODYNAMICS

Optional

00008 Adj. roof air deflector short Sleeper High Cab	00097 Adj. roof air deflector for Sleeper Cab
02662 Adj. roof air defl. long mid XD Sleeper High Cab	00020 Adj. roof air deflector long low Sleeper High Cab
00082 Adj. roof air deflector for Day Cab	

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and aircoc; No auxiliary cab heater.

Optional

02354 Steering wheel with silver accents	02117 Third seat
02355 Steering wheel, leather	02837 Dashboard table
02353 Cab interior decoration: Argenta	03948 Single drawer
02350 Cab interior decoration: Natura	03954 Refrigerator
07733 Driver seat: Luxury Air	02838 Foam mattress for lower bunk
07736 Driver seat: Super Air	02854 Xtra Comfort mattress for lower bunk
07737 Driver seat: Xtra Leather Air	01775 Xtra Comfort mattress with topper for lower bunk
01740 Arm rest at both sides of the driver seat	06970 Automatic Cab Climate Control

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85 km/h; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

09681 Preparation for Maut	03684 Infotainment including DAF Truck Navigation
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system; No EC-ADR packages; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	03628 DAF drowsiness & distraction detection
--	---

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: air suspension, SR1344; No lifting device.

Optional

04647 Front springs air

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; Tyre pressure monitoring; F1,315/70R22.5GO EQMSU 158/150 L Steering ABA 3P; R1,315/70R22.5GO EQMDU 154/150 L Traction ABB 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine PX-7, 6 cylinder diesel engine, 6.7 litres. Output 167 kW (227 hp) at 1900 rpm. Max. torque 890 Nm at 1000-1700 rpm.; Exhaust emission Euro 6; 8-speed PowerLine 8AP1000 overdrive, 4.89-0.64; Gearbox ratio 4.89-0.64; Rear axle ratio 5.57.

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS).Engine driven, water cooled aire compressor with automatic air heated dryer..

Optional

02861 PX Engine Brake	04901 Spring brake cylinders on the first front axle
01497 Park brake control pneumatic with spoken warning	

CHASSIS

Wheelbase 4.00 m / rear overhang 1.70 m; Side member height 260 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 30 l, right-hand side chassis; Spray suppression.

Optional

02601 Side member height 310 mm	07071 Spare wheel carrier right-hand side
16157 Fuel tanks, material and sizes	03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

Optional

08026 Trailer coupling Rockinger D=13.0 B	04659 Trailer cable EBS
--	--------------------------------

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

09421 Additional spare wiring **08121** Tail lift application

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 80 A, batteries 2x 140 Ah..

Optional

01897 Alternator 100 A **07671** Batteries 2x210Ah AGM
08797 Batteries 2x175Ah C-type

GVM AND GCM

Chassis weight related technical GVM max 19000 kg; Driveline related max GCM 19000 kg.

APPLICATION CONDITIONS

Air intake front.

Optional

02260 Extra cab insulation **03648** Cyclonic air intake high

SERVICE AND MAINTENANCE

Warranty Plus - Driveline, takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd and 3rd year driveline, no km limitation and 1st year breakdown.; ITS service.

VEHICLE DELIVERY

Minimum toolkit.

Optional

07569 Lifting jack

OPTION PACKAGES

Optional

17595 Executive Pack XD/XF

Go to **DAF.com** to configure your own perfect DAF.

XD 230

FA 4X2 Rigid, 19t

Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions										
WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾	
DAY CAB	4,00	1,70	3752	1560	5313	3248	11440	13687	0,50	0,07	2,06	4,39	5,55	7,23	0,97	0,94	14,02	15,41
	4,20	1,80	3753	1574	5327	3247	11426	13673	0,50	0,07	2,06	4,65	5,87	7,53	0,97	0,94	14,53	15,94
	4,50	1,95	3756	1611	5367	3244	11389	13633	0,50	0,07	2,06	5,06	6,37	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	3758	1624	5382	3242	11376	13618	0,50	0,07	2,06	5,33	6,71	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	3753	1652	5405	3247	11348	13595	0,50	0,07	2,06	5,60	7,03	8,78	0,97	0,94	16,35	17,79
	5,10	2,75	3809	1791	5601	3191	11209	13399	0,50	0,07	2,06	5,87	7,39	9,38	0,97	0,94	16,87	18,32
	5,40	2,65	3833	1798	5632	3167	11202	13368	0,50	0,07	2,06	6,30	7,91	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	3846	1810	5656	3154	11190	13344	0,50	0,07	2,06	6,71	8,41	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	3885	1873	5757	3115	11127	13243	0,50	0,07	2,06	7,27	9,11	10,43	0,97	0,94	19,49	20,96
	6,60	3,45	3820	1851	5672	3180	11149	13328	0,50	0,07	2,01	7,93	9,89	11,58	1,02	0,99	20,80	22,28
	6,90	3,50	3829	1862	5691	3171	11138	13309	0,50	0,07	2,01	8,34	10,39	11,93	1,02	0,99	21,59	23,08
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,00	1,70	3863	1557	5420	3137	11443	13580	0,83	0,07	2,06	3,77	4,94	7,23	0,97	0,94	14,02	15,41
	4,20	1,80	3864	1571	5434	3136	11429	13566	0,83	0,07	2,06	4,04	5,27	7,53	0,97	0,94	14,53	15,94
	4,50	1,95	3866	1608	5474	3134	11392	13526	0,83	0,07	2,06	4,46	5,78	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	3868	1621	5489	3132	11379	13511	0,83	0,07	2,06	4,73	6,11	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	3863	1649	5512	3137	11351	13488	0,83	0,07	2,06	5,00	6,45	8,78	0,97	0,94	16,35	17,79
	5,10	2,75	3919	1789	5708	3081	11211	13292	0,83	0,07	2,06	5,27	6,79	9,38	0,97	0,94	16,87	18,32
	5,40	2,65	3943	1796	5738	3057	11204	13262	0,83	0,07	2,06	5,70	7,31	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	3956	1807	5763	3044	11193	13237	0,83	0,07	2,06	6,13	7,83	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	3994	1870	5864	3006	11130	13136	0,83	0,07	2,06	6,69	8,54	10,43	0,97	0,94	19,49	20,96
	6,60	3,45	3929	1849	5778	3071	11151	13222	0,83	0,07	2,01	7,35	9,32	11,58	1,02	0,99	20,80	22,28
	6,90	3,50	3938	1860	5797	3062	11140	13203	0,83	0,07	2,01	7,76	9,83	11,93	1,02	0,99	21,59	23,08
SLEEPER HIGH CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,00	1,70	3892	1558	5450	3108	11442	13550	0,83	0,07	2,54	3,78	4,95	7,23	0,97	0,94	14,02	15,41
	4,20	1,80	3893	1571	5464	3107	11429	13536	0,83	0,07	2,54	4,05	5,29	7,53	0,97	0,94	14,53	15,94
	4,50	1,95	3896	1609	5505	3104	11391	13495	0,83	0,07	2,54	4,47	5,79	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	3897	1622	5519	3103	11378	13481	0,83	0,07	2,54	4,74	6,13	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	3892	1650	5542	3108	11350	13458	0,83	0,07	2,54	5,02	6,46	8,78	0,97	0,94	16,35	17,79
	5,10	2,75	3949	1789	5738	3051	11211	13262	0,83	0,07	2,54	5,29	6,82	9,38	0,97	0,94	16,87	18,32
	5,40	2,65	3972	1796	5769	3028	11204	13231	0,83	0,07	2,54	5,73	7,34	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	3985	1808	5793	3015	11192	13207	0,83	0,07	2,54	6,14	7,86	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	4023	1871	5894	2977	11129	13106	0,83	0,07	2,54	6,71	8,55	10,43	0,97	0,94	19,49	20,96
	6,60	3,45	3959	1850	5809	3041	11150	13191	0,83	0,07	2,49	7,36	9,34	11,58	1,02	0,99	20,80	22,28
	6,90	3,50	3967	1860	5828	3033	11140	13172	0,83	0,07	2,49	7,78	9,85	11,93	1,02	0,99	21,59	23,08

OTHER DIMENSIONS	VA: 1,53	HV ¹³⁾ : 1,00	HV ¹⁴⁾ : 0,93	RB: 0,79	SB: 1,82	TB ¹⁵⁾ : 2,48
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 75 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cabin roof hatch.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle(s).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.

A PACCAR COMPANY

DRIVEN BY QUALITY

DAF

067F6806AAAA - 202545A - 10-07-2025