


Specification sheet

XD 230

FA 4X2 Rigid, 19t

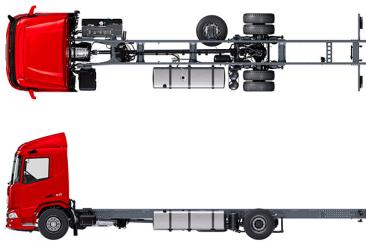

ENGINES

- XD NewGen 230 PX-7 (167 kW / 227 hp)
- XD NewGen 260 PX-7 (189 kW / 257 hp)
- XD NewGen 290 PX-7 (212 kW / 287 hp)
- XD NewGen 310 PX-7 (227 kW / 308 hp)

GVM¹⁾

- 18000 kg
-
- Max. front 8000 kg
- Max. rear 11500 kg

GCM²⁾

- 19000 kg
-
-
-

055F6806AAAA - 202545A - 10-07-2025

Latvia, SIA Centrako, www.daf.lv

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; DAF Corner View.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
01226 Cab suspension air	06629 Two hazard beacon lights
03358 External sun visor	03232 Front windscreen with solar control foil
03922 Fog lights front	03317 Rear window: double glass
00936 Auxiliary LED lights on cab roof, prepared	07343 Kerb view window co-driver door
01836 LED Skylights	01362 DAF Digital Vision System
00949 LED Skylights; aux. LED lights on cab rf, prepared	

AERODYNAMICS

Optional

00008 Adj. roof air deflector short Sleeper High Cab	00097 Adj. roof air deflector for Sleeper Cab
02662 Adj. roof air defl. long mid XD Sleeper High Cab	00020 Adj. roof air deflector long low Sleeper High Cab
00082 Adj. roof air deflector for Day Cab	

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and aircoc; No auxiliary cab heater.

Optional

02354 Steering wheel with silver accents	02117 Third seat
02355 Steering wheel, leather	02837 Dashboard table
02353 Cab interior decoration: Argenta	03948 Single drawer
02350 Cab interior decoration: Natura	03954 Refrigerator
07733 Driver seat: Luxury Air	02838 Foam mattress for lower bunk
07736 Driver seat: Super Air	02854 Xtra Comfort mattress for lower bunk
07737 Driver seat: Xtra Leather Air	01775 Xtra Comfort mattress with topper for lower bunk
01740 Arm rest at both sides of the driver seat	06970 Automatic Cab Climate Control

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85 km/h; Adaptive Cruise Control with FCW and AEBS-3; Driver Performance Assistant.

Optional

09681 Preparation for Maut	03684 Infotainment including DAF Truck Navigation
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system; No EC-ADR packages; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	03628 DAF drowsiness & distraction detection
--	---

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: air suspension, SR1344; No lifting device.

Optional

04647 Front springs air

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; Tyre pressure monitoring; F1,315/70R22.5GO EQMSU 158/150 L Steering ABA 3P; R1,315/70R22.5GO EQMDU 154/150 L Traction ABB 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine PX-7, 6 cylinder diesel engine, 6.7 litres. Output 167 kW (227 hp) at 1900 rpm. Max. torque 890 Nm at 1000-1700 rpm.; Exhaust emission Euro 6; 8-speed PowerLine 8AP1000 overdrive, 4.89-0.64; Gearbox ratio 4.89-0.64; Rear axle ratio 5.57.

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS).Engine driven, water cooled aire compressor with automatic air heated dryer..

Optional

02861 PX Engine Brake	04901 Spring brake cylinders on the first front axle
01497 Park brake control pneumatic with spoken warning	

CHASSIS

Wheelbase 4.00 m / rear overhang 1.70 m; Side member height 260 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 30 l, right-hand side chassis; Spray suppression.

Optional

02601 Side member height 310 mm	07071 Spare wheel carrier right-hand side
16157 Fuel tanks, material and sizes	03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

Optional

08026 Trailer coupling Rockinger D=13.0 B	04659 Trailer cable EBS
--	--------------------------------

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

09421 Additional spare wiring **08121** Tail lift application

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 80 A, batteries 2x 140 Ah..

Optional

01897 Alternator 100 A **07671** Batteries 2x210Ah AGM
08797 Batteries 2x175Ah C-type

GVM AND GCM

Chassis weight related technical GVM max 19000 kg; Driveline related max GCM 19000 kg.

APPLICATION CONDITIONS

Air intake front.

Optional

02260 Extra cab insulation **03648** Cyclonic air intake high

SERVICE AND MAINTENANCE

Warranty Plus - Driveline, takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd and 3rd year driveline, no km limitation and 1st year breakdown.; ITS service.

VEHICLE DELIVERY

Minimum toolkit.

Optional

07569 Lifting jack

OPTION PACKAGES


Optional

17595 Executive Pack XD/XF

Go to **DAF.com** to configure your own perfect DAF.

XD 230

FA 4X2 Rigid, 19t

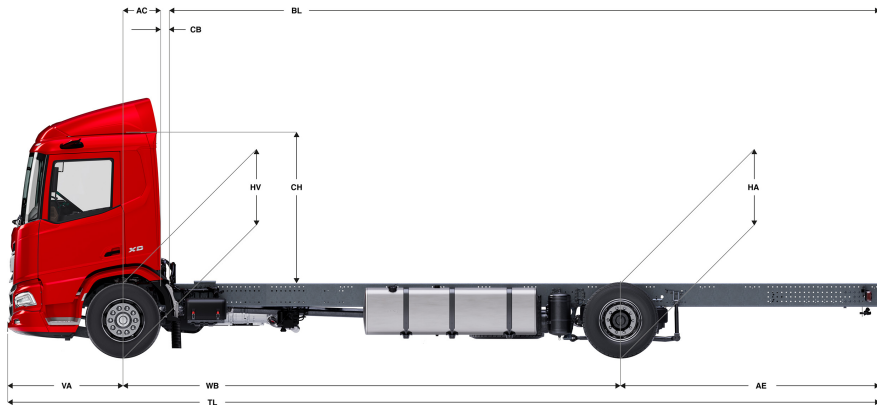

	Wheelbase - AE		Unladen weight ¹⁾			Gross Carrying Capacity			Variable dimensions															
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾						
DAY CAB	4,00	1,70	3906	1730	5636	4094	9770	12364	0,50	0,07	2,06	4,42	5,60	7,23	0,97	0,94	14,02	15,41						
	4,20	1,80	3901	1749	5650	4099	9751	12350	0,50	0,07	2,06	4,69	5,94	7,53	0,97	0,94	14,53	15,94						
	4,50	1,95	3897	1794	5691	4103	9706	12309	0,50	0,07	2,06	5,09	6,43	7,98	0,97	0,94	15,31	16,73						
	4,70	2,05	3894	1811	5705	4106	9689	12295	0,50	0,07	2,06	5,36	6,77	8,28	0,97	0,94	15,83	17,26						
	4,90	2,35	3885	1843	5728	4115	9657	12272	0,50	0,07	2,06	5,63	7,09	8,78	0,97	0,94	16,35	17,79						
	5,10	2,75	3938	1986	5924	4062	9514	12076	0,50	0,07	2,06	5,90	7,45	9,38	0,97	0,94	16,87	18,32						
	5,40	2,65	3957	1998	5955	4043	9502	12045	0,50	0,07	2,06	6,32	7,97	9,58	0,97	0,94	17,66	19,11						
	5,70	2,65	3965	2014	5979	4035	9486	12021	0,50	0,07	2,06	6,73	8,47	9,88	0,97	0,94	18,44	19,90						
	6,10	2,80	3998	2082	6081	4002	9418	11919	0,50	0,07	2,06	7,29	9,16	10,43	0,97	0,94	19,49	20,96						
	6,60	3,45	3928	2067	5995	4072	9433	12005	0,50	0,07	2,01	7,93	9,94	11,58	1,02	0,99	20,80	22,28						
	6,90	3,50	3933	2080	6014	4067	9420	11986	0,50	0,07	2,01	8,34	10,45	11,93	1,02	0,99	21,59	23,08						
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾						
	4,00	1,70	4016	1727	5743	3984	9773	12257	0,83	0,07	2,06	3,81	5,00	7,23	0,97	0,94	14,02	15,41						
	4,20	1,80	4011	1746	5757	3989	9754	12243	0,83	0,07	2,06	4,07	5,33	7,53	0,97	0,94	14,53	15,94						
	4,50	1,95	4007	1791	5798	3993	9709	12202	0,83	0,07	2,06	4,48	5,83	7,98	0,97	0,94	15,31	16,73						
	4,70	2,05	4004	1808	5812	3996	9692	12188	0,83	0,07	2,06	4,75	6,17	8,28	0,97	0,94	15,83	17,26						
	4,90	2,35	3995	1840	5835	4005	9660	12165	0,83	0,07	2,06	5,02	6,50	8,78	0,97	0,94	16,35	17,79						
	5,10	2,75	4047	1984	6031	3953	9516	11969	0,83	0,07	2,06	5,30	6,86	9,38	0,97	0,94	16,87	18,32						
	5,40	2,65	4066	1996	6062	3934	9504	11938	0,83	0,07	2,06	5,73	7,37	9,58	0,97	0,94	17,66	19,11						
	5,70	2,65	4074	2012	6086	3926	9488	11914	0,83	0,07	2,06	6,14	7,89	9,88	0,97	0,94	18,44	19,90						
	6,10	2,80	4107	2080	6188	3893	9420	11812	0,83	0,07	2,06	6,69	8,58	10,43	0,97	0,94	19,49	20,96						
	6,60	3,45	4037	2065	6102	3963	9435	11898	0,83	0,07	2,01	7,35	9,38	11,58	1,02	0,99	20,80	22,28						
	6,90	3,50	4042	2079	6121	3958	9421	11879	0,83	0,07	2,01	7,76	9,89	11,93	1,02	0,99	21,59	23,08						
SLEEPER HIGH CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾						
	4,00	1,70	4045	1727	5773	3955	9773	12227	0,83	0,07	2,54	3,82	5,02	7,23	0,97	0,94	14,02	15,41						
	4,20	1,80	4041	1746	5787	3959	9754	12213	0,83	0,07	2,54	4,08	5,35	7,53	0,97	0,94	14,53	15,94						
	4,50	1,95	4036	1792	5828	3964	9708	12172	0,83	0,07	2,54	4,50	5,86	7,98	0,97	0,94	15,31	16,73						
	4,70	2,05	4033	1809	5842	3967	9691	12158	0,83	0,07	2,54	4,77	6,18	8,28	0,97	0,94	15,83	17,26						
	4,90	2,35	4025	1841	5865	3975	9659	12135	0,83	0,07	2,54	5,03	6,52	8,78	0,97	0,94	16,35	17,79						
	5,10	2,75	4077	1984	6061	3923	9516	11939	0,83	0,07	2,54	5,32	6,87	9,38	0,97	0,94	16,87	18,31						
	5,40	2,65	4096	1996	6092	3904	9504	11908	0,83	0,07	2,54	5,74	7,40	9,58	0,97	0,94	17,66	19,11						
	5,70	2,65	4104	2012	6116	3896	9488	11884	0,83	0,07	2,54	6,16	7,92	9,88	0,97	0,94	18,44	19,90						
	6,10	2,80	4137	2081	6218	3863	9419	11782	0,83	0,07	2,54	6,73	8,62	10,43	0,97	0,94	19,49	20,96						
	6,60	3,45	4067	2065	6132	3933	9435	11868	0,83	0,07	2,49	7,38	9,42	11,58	1,02	0,99	20,80	22,28						
	6,90	3,50	4072	2079	6151	3928	9421	11849	0,83	0,07	2,49	7,80	9,93	11,93	1,02	0,99	21,59	23,08						
OTHER DIMENSIONS																			VA: 1,53	HV ¹³⁾ : 0,99	HV ¹⁴⁾ : 0,92	RB: 0,79	SB: 1,82	TB ¹⁵⁾ : 2,48

1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 340 litres of fuel, 30 litres of AdBlue® and driver of 80 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cabin roof hatch.

8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle(s).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.

A PACCAR COMPANY

DRIVEN BY QUALITY

DAF

055F6806AAAA - 202545A - 10-07-2025