


Specification sheet

XD 230

FA 4X2 Rigid, 19t

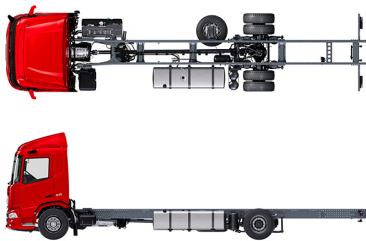

ENGINES
XD NewGen 230 PX-7 (167 kW / 227 hp)
XD NewGen 260 PX-7 (189 kW / 257 hp)
XD NewGen 290 PX-7 (212 kW / 287 hp)
XD NewGen 310 PX-7 (227 kW / 308 hp)

GVM ¹⁾	GCM ²⁾
19000 kg	19000 kg
Max. front 8000 kg	
Max. rear 13000 kg	

991F6806AAAA - 202545A - 10-07-2025

DAF Trucks N.V., The Netherlands, www.daf.com

CAB EXTERIOR

Luxurious Day Cab with unrivalled aerodynamics for fuel efficient driving and low CO2 emissions. The huge and deep frontscreen, curved at the sides combined with large side windows offer an unsurpassed direct view for the driver, to enhance road safety. Cab length: 2030 mm; cab width: 2500 mm. Number of cab entrance steps: 2.; Cab suspension mechanical; LED head lights; DAF Corner View.

Optional

07018 Sleeper Cab	01925 Two LED work lamps for cab rear wall
06244 Sleeper High Cab	01891 Hazard beacons on cab front, prepared
01226 Cab suspension air	06629 Two hazard beacon lights
03358 External sun visor	03232 Front windscreen with solar control foil
03922 Fog lights front	03317 Rear window: double glass
00936 Auxiliary LED lights on cab roof, prepared	07343 Kerb view window co-driver door
01836 LED Skylights	01362 DAF Digital Vision System
00949 LED Skylights; aux. LED lights on cab rf, prepared	

AERODYNAMICS

Optional

00008 Adj. roof air deflector short Sleeper High Cab	00082 Adj. roof air deflector for Day Cab
00124 Adj. rf air defl.long mid >4m(!) Sleeper High Cab	00097 Adj. roof air deflector for Sleeper Cab
01538 Adj. roof air defl. long high >4m(!) Sleeper High	00020 Adj. roof air deflector long low Sleeper High Cab
02662 Adj. roof air defl. long mid XD Sleeper High Cab	

COLOURS

Cab colour E1980 Crystal White; Chassis colour grey.; Colour of bumper: Crystal White.

CAB INTERIOR

Cab interior trim colour: Luxury; Dashboard finish: Vision; Cab interior decoration: Hexagon; Driver seat: Comfort Air; Co-driver seat: cinema with fabric cover; No dashboard table; Storage compartment in centre; Automatic Temperature Control and airco; No auxiliary cab heater.

Optional

02354 Steering wheel with silver accents	02117 Third seat
02355 Steering wheel, leather	02837 Dashboard table
02353 Cab interior decoration: Argenta	03948 Single drawer
02350 Cab interior decoration: Natura	03954 Refrigerator
07733 Driver seat: Luxury Air	02838 Foam mattress for lower bunk
07736 Driver seat: Super Air	02854 Xtra Comfort mattress for lower bunk
07737 Driver seat: Xtra Leather Air	01775 Xtra Comfort mattress with topper for lower bunk
01740 Arm rest at both sides of the driver seat	06970 Automatic Cab Climate Control

COMMUNICATION AND DRIVING MANAGEMENT

PACCAR Connect; Tachograph digital, Stoneridge version G2V2A; Speed limiter setting 85 km/h; Adaptive Cruise Control with FCW and AEB-3; Driver Performance Assistant.

Optional

09681 Preparation for Maut	03684 Infotainment including DAF Truck Navigation
03470 Infotainment incl. DAF Truck Nav. and tablet prep.	

SAFETY AND SECURITY

Speed limit recognition; DAF drowsiness detection; Lane Departure Warning System; Vehicle Stability Control (VSC); Basic engine immobiliser system; No EC-ADR packages; Drive-off Assist; DAF Side & Turn Assist.

Optional

08631 Air bag (driver) and 2 seat belt tensioners	03628 DAF drowsiness & distraction detection
02567 No Traffic Sign Assist	01929 No Drive-off Assist
02569 No Driver State Monitoring	01952 No DAF Side/Turn Assist

SUSPENSION AND AXLES

Front: 8.00 t, parabolic, 163N; Rear axle load 13.00 t; Rear: air suspension, SR1344; No lifting device.

Optional

04647 Front springs air

WHEELS AND TYRES

Driven rear axle(s): 315/70R22.5; Tyre pressure monitoring; F1,315/70R22.5GO EQMSU 158/150 L Steering ABA 3P; R1,315/70R22.5GO EQMDU 154/150 L Traction ABB 3P.

Optional

16152 Tyre makes and types

DRIVELINE

Engine PX-7, 6 cylinder diesel engine, 6.7 litres. Output 167 kW (227 hp) at 1900 rpm. Max. torque 890 Nm at 1000-1700 rpm.; Exhaust emission Euro 6; 8-speed PowerLine 8AP1000 overdrive, 4.89-0.64; Gearbox ratio 4.89-0.64; Rear axle ratio 5.57.

BRAKE SYSTEM

Exhaust brake; Ventilated disc brakes front and rear. Dual circuit air system with electronic control (EBS).Engine driven, water cooled aire compressor with automatic air h eated dryer..

Optional

02861 PX Engine Brake	04901 Spring brake cylinders on the first front axle
01497 Park brake control pneumatic with spoken warning	

CHASSIS

Wheelbase 4.00 m / rear overhang 1.70 m; Side member height 260 mm; Standard component location; 340 l alu fuel tank LH, height 620 mm; Tank for AdBlue® 30 l, right-hand side chassis; Spray suppression.

Optional

02601 Side member height 310 mm	07071 Spare wheel carrier right-hand side
16157 Fuel tanks, material and sizes	03323 Rear light with LEDs

DRAWBAR AND TRAILER EQUIPMENT

Closing member D-value = 0kN.

Optional

08026 Trailer coupling Rockinger **04659** Trailer cable EBS
D=13.0 B

BODIES AND PREPARATIONS FOR BODYING

Application connector chassis.

Optional

09421 Additional spare wiring **08121** Tail lift application

POWER TAKE-OFF (PTO)

Optional

16148 PTO types and positions

24V POWER SUPPLY

Alternator 80 A, batteries 2x 140 Ah..

Optional

01897 Alternator 100 A **07671** Batteries 2x210Ah AGM
08797 Batteries 2x175Ah C-type

GVM AND GCM

Chassis weight related technical GVM max 19000 kg; Driveline related max GCM 19000 kg.

APPLICATION CONDITIONS

Air intake front.

Optional

02260 Extra cab insulation **03648** Cyclonic air intake high

SERVICE AND MAINTENANCE

Standard Warranty takes care of 1 year complete vehicle as supplied by the OEM (excl. real wear parts), 2nd year driveline and 1st year breakdown.; ITS service.

VEHICLE DELIVERY

Minimum toolkit.

Optional

07569 Lifting jack

OPTION PACKAGES



Optional

17595 Executive Pack XD/XF

Go to **DAF.com** to configure your own perfect DAF.

XD 230

FA 4X2 Rigid, 19t

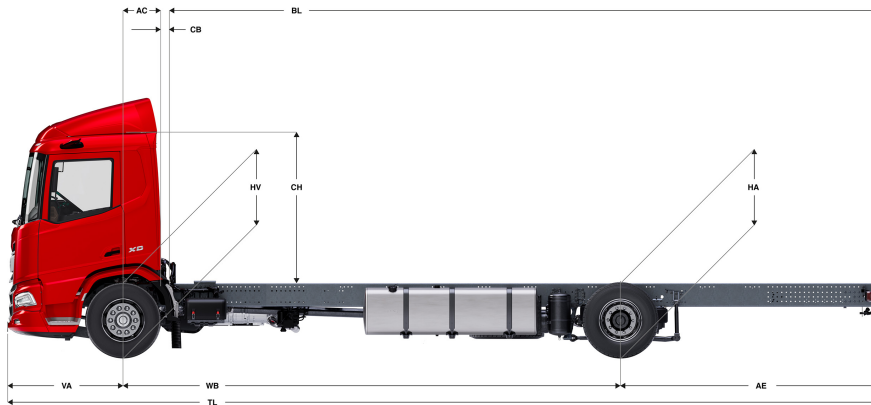

	Wheelbase - AE		Unladen weight ⁹⁾			Gross Carrying Capacity			Variable dimensions									
	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
DAY CAB	4,00	1,70	3689	1550	5239	4311	11450	13761	0,50	0,07	2,06	4,35	5,52	7,23	0,97	0,94	14,02	15,41
	4,20	1,80	3690	1564	5253	4310	11436	13747	0,50	0,07	2,06	4,63	5,84	7,53	0,97	0,94	14,53	15,94
	4,50	1,95	3692	1602	5294	4308	11398	13706	0,50	0,07	2,06	5,04	6,33	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	3693	1615	5308	4307	11385	13692	0,50	0,07	2,06	5,31	6,67	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	3688	1643	5331	4312	11357	13669	0,50	0,07	2,06	5,58	6,99	8,78	0,97	0,94	16,35	17,79
	5,10	2,75	3744	1783	5527	4256	11217	13473	0,50	0,07	2,06	5,84	7,35	9,38	0,97	0,94	16,87	18,32
	5,40	2,65	3767	1790	5558	4233	11210	13442	0,50	0,07	2,06	6,26	7,86	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	3780	1802	5582	4220	11198	13418	0,50	0,07	2,06	6,68	8,36	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	3818	1866	5684	4182	11134	13316	0,50	0,07	2,06	7,24	9,06	10,43	0,97	0,94	19,49	20,96
	6,60	3,45	3753	1845	5598	4247	11155	13402	0,50	0,07	2,01	7,90	9,83	11,58	1,02	0,99	20,80	22,28
	6,90	3,50	3761	1856	5617	4239	11144	13383	0,50	0,07	2,01	8,30	10,33	11,93	1,02	0,99	21,59	23,08
SLEEPER CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,00	1,70	3789	1557	5346	4211	11443	13654	0,83	0,07	2,06	3,74	4,90	7,23	0,97	0,94	14,02	15,41
	4,20	1,80	3790	1571	5360	4210	11429	13640	0,83	0,07	2,06	4,01	5,24	7,53	0,97	0,94	14,53	15,94
	4,50	1,95	3792	1608	5401	4208	11392	13599	0,83	0,07	2,06	4,42	5,73	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	3794	1621	5415	4206	11379	13585	0,83	0,07	2,06	4,70	6,07	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	3789	1649	5438	4211	11351	13562	0,83	0,07	2,06	4,96	6,39	8,78	0,97	0,94	16,35	17,79
	5,10	2,75	3845	1789	5634	4155	11211	13366	0,83	0,07	2,06	5,23	6,75	9,38	0,97	0,94	16,87	18,32
	5,40	2,65	3869	1796	5665	4131	11204	13335	0,83	0,07	2,06	5,67	7,27	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	3882	1807	5689	4118	11193	13311	0,83	0,07	2,06	6,09	7,79	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	3920	1871	5791	4080	11129	13209	0,83	0,07	2,06	6,65	8,47	10,43	0,97	0,94	19,49	20,96
SLEEPER HIGH CAB	WB	AE ⁵⁾	Front	Rear	Total	Front	Rear	Total	AC	CB ⁶⁾	CH ⁷⁾	BL ⁸⁾	BL	TL	HA ⁹⁾	HA ¹⁰⁾	TK ¹¹⁾	TW ¹²⁾
	4,00	1,70	3818	1558	5376	4182	11442	13624	0,83	0,07	2,54	3,75	4,91	7,23	0,97	0,94	14,02	15,41
	4,20	1,80	3819	1571	5390	4181	11429	13610	0,83	0,07	2,54	4,02	5,25	7,53	0,97	0,94	14,53	15,94
	4,50	1,95	3822	1609	5431	4178	11391	13569	0,83	0,07	2,54	4,43	5,74	7,98	0,97	0,94	15,31	16,73
	4,70	2,05	3823	1622	5445	4177	11378	13555	0,83	0,07	2,54	4,71	6,09	8,28	0,97	0,94	15,83	17,26
	4,90	2,35	3819	1650	5468	4181	11350	13532	0,83	0,07	2,54	4,98	6,42	8,78	0,97	0,94	16,35	17,79
	5,10	2,75	3875	1789	5664	4125	11211	13336	0,83	0,07	2,54	5,25	6,76	9,38	0,97	0,94	16,87	18,32
	5,40	2,65	3899	1796	5695	4101	11204	13305	0,83	0,07	2,54	5,68	7,29	9,58	0,97	0,94	17,66	19,11
	5,70	2,65	3912	1808	5719	4088	11192	13281	0,83	0,07	2,54	6,10	7,80	9,88	0,97	0,94	18,44	19,90
	6,10	2,80	3950	1871	5821	4050	11129	13179	0,83	0,07	2,54	6,66	8,49	10,43	0,97	0,94	19,49	20,96
	6,60	3,45	3885	1850	5735	4115	11150	13265	0,83	0,07	2,49	7,31	9,29	11,58	1,02	0,99	20,80	22,28
	6,90	3,50	3894	1860	5754	4106	11140	13246	0,83	0,07	2,49	7,74	9,79	11,93	1,02	0,99	21,59	23,08

OTHER DIMENSIONS	VA: 1,53	HV ¹³⁾ : 1,00	HV ¹⁴⁾ : 0,93	RB: 0,79	SB: 1,82	TB ¹⁵⁾ : 2,48
------------------	----------	--------------------------	--------------------------	----------	----------	--------------------------

- 1) GVM in conformity with registration documents.

2) GCM in conformity with registration documents.

3) Axle load with standard tyre size.

4) Chassis and cab weight calculated with: Standard specification items only with 0 litres of fuel, 0 litres of AdBlue® and driver of 0 kg, tolerance ± 3%. Changing of the specification can have major impact on vehicle weight.

5) Other AE dimensions may be available for shown WB. Modify rear overhang to the calculated body length.

6) CB is based on standard air intake and/or exhaust.

7) Cab height is measured from frame member to closed cabin roof hatch.
- 8) Calculate customer specific body length with TOPEC. Body lengths shown based on evenly distributed load at max axle load.

9) Unladen height at centre of driven axle(s).

10) Laden height at centre of driven axle(s).

11) TK = turning circle between kerbs.

12) TW = turning circle between walls.

13) Unladen height at centre of front axle(s).

14) Laden height at centre of front axle(s).

15) TB is overall width at rear. (At centre of front axle 255).

Depending on the vehicle configuration a specific option may not be possible. The availability and specification of this vehicle may differ per country. For further information please contact the DAF organisation. Pictures and technical illustrations are not binding in detail and can differ from the standard specification. Subject to modification without prior notice.